
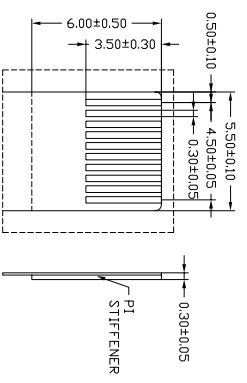
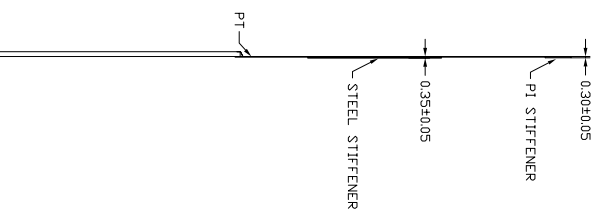


| | | | |
|-------|---------------|-----------|------------|
| REV 1 | DESCRIPTION 1 | BY | DATE |
| A | RELEASED | Ruby Long | 2014/05/21 |

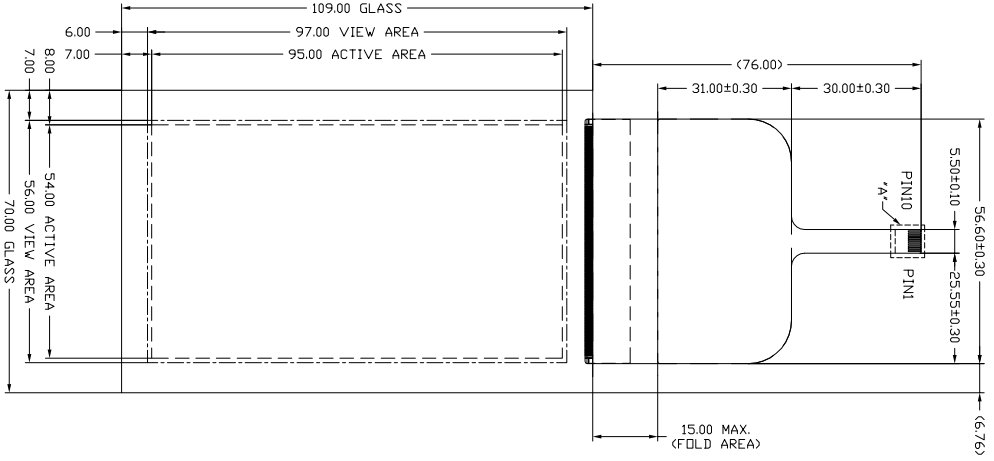

IEC PIN TABLE

| PIN# | IEC |
|------|-----------|
| 1 | SCL |
| 2 | SDA |
| 3 | /RESET |
| 4 | /OHG |
| 5 | NC |
| 6 | GND |
| 7 | VDD(3.3V) |
| 8 | NC |
| 9 | NC |
| 10 | NC |

- NOTES:
1. ALL UNITS IN MM.
 2. OPERATING TEMPERATURE: -20°C TO 80°C
 3. STORAGE TEMPERATURE: -30°C TO 80°C
 4. FPC BENDING RADIUS IS R10MM MIN
 5. THE COMPATIBLE MOLEX FPC CONNECTOR IS 52745-1097 DR EQUIVALENT
 6. ALL MATERIALS MUST BE ROHS COMPLIANT
 7. (∅) DIMENSION FOR REFERENCE

OCULAR
DIGITAL YOUR ADVANTAGE

THIS DOCUMENT IS CONFIDENTIAL, PROPRIETARY INFORMATION OF OCULAR CORPORATION AND SHALL NOT BE DISSEMINATED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF OCULAR CORPORATION.

| | | | |
|-------------------------|---------|----------------|--------------|
| UNLESS OTHERWISE NOTED: | | ENGINEER | DATE |
| UNITS | DECIMAL | Neil Zeng | 2014/05/21 |
| INCHES | XXXX.XX | Ruby Long | 2014/05/21 |
| ANGLES | ±0.5° | | |
| THIRD ANGLE PROJECTION | | DRAWING No.: | REV. A |
| | | F043-0224S-192 | |
| | | SCALE 1 : 1 | SHEET 1 OF 1 |

8 7 6 5 4 3 2 1

A B C D