
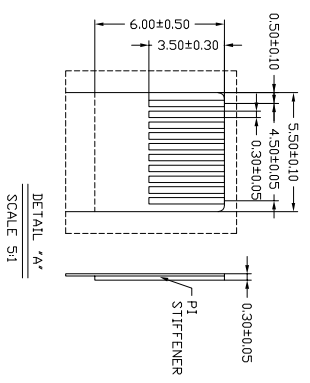
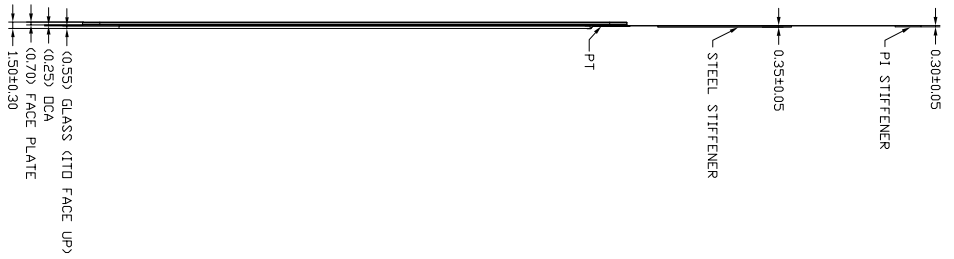


REV 1	DESCRIPTION 1	BY	DATE
A	RELEASED	Ruby Long	2014/05/21

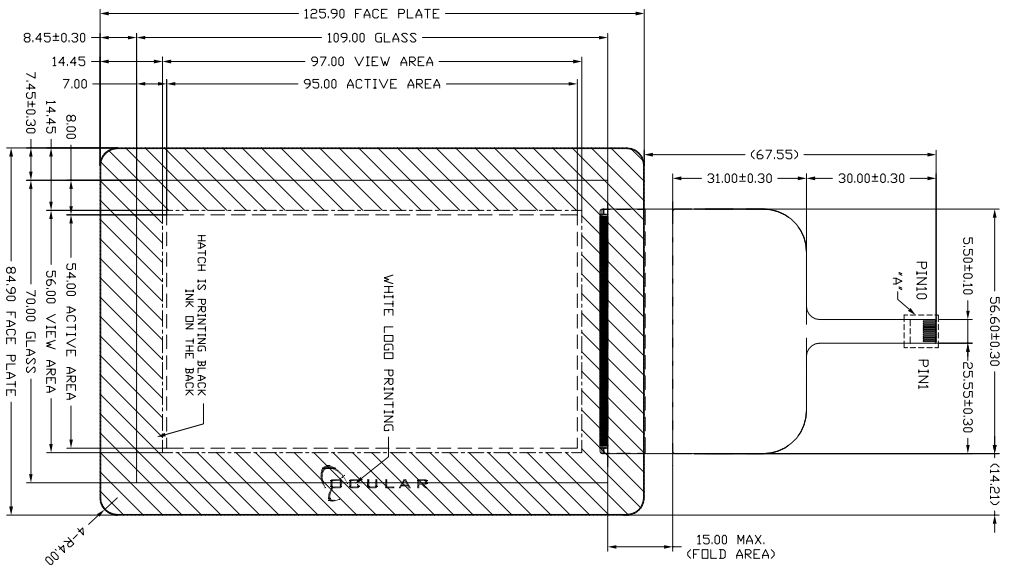

12C PIN TABLE

PINH	12C
1	SCL
2	SDA
3	/RESET
4	/CHG
5	NC
6	GND
7	VDD(3.3V)
8	NC
9	NC
10	NC

- NOTES:
1. ALL UNITS IN MM.
 2. OPERATING TEMPERATURE: -20°C TO 80°C
 3. STORAGE TEMPERATURE: -30°C TO 80°C
 4. PCB BENDING RADIUS IS R10MM MIN
 5. THE COMPATIBLE MOLEX FPC CONNECTOR IS 52745-1097 OR EQUIVALENT
 6. ALL MATERIALS MUST BE ROHS COMPLIANT
 7. FACE PLATE: SODA-LIME GLASS/CHEMICALLY STRENGTHEN, NO SHARP CORNERS OR EDGES.
 8. (C) DIMENSION FOR REFERENCE

OCULAR
DIGITAL YOUR ADVANTAGE

THIS DOCUMENT IS CONFIDENTIAL, PROPRIETARY INFORMATION OF OCULAR CORPORATION AND SHALL NOT BE DISSEMINATED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF OCULAR CORPORATION.

UNLESS OTHERWISE NOTED:		ENGR MANAGER :	DATE :
UNITS	DECIMAL	CHECKED BY :	2014/05/21
INCHES	XXXX.XX	DWN BY :	Ruby Long
ANGLES	±0.5°	DRAWING TITLE :	4.3" FACE PLATE, MXT224S, 12C
THIRD ANGLE PROJECTION		DRAWING No. :	F043-0224S-193
		SCALE	1 : 1
		SHEET	1 OF 1

8 7 6 5 4 3 2 1

A B C D