
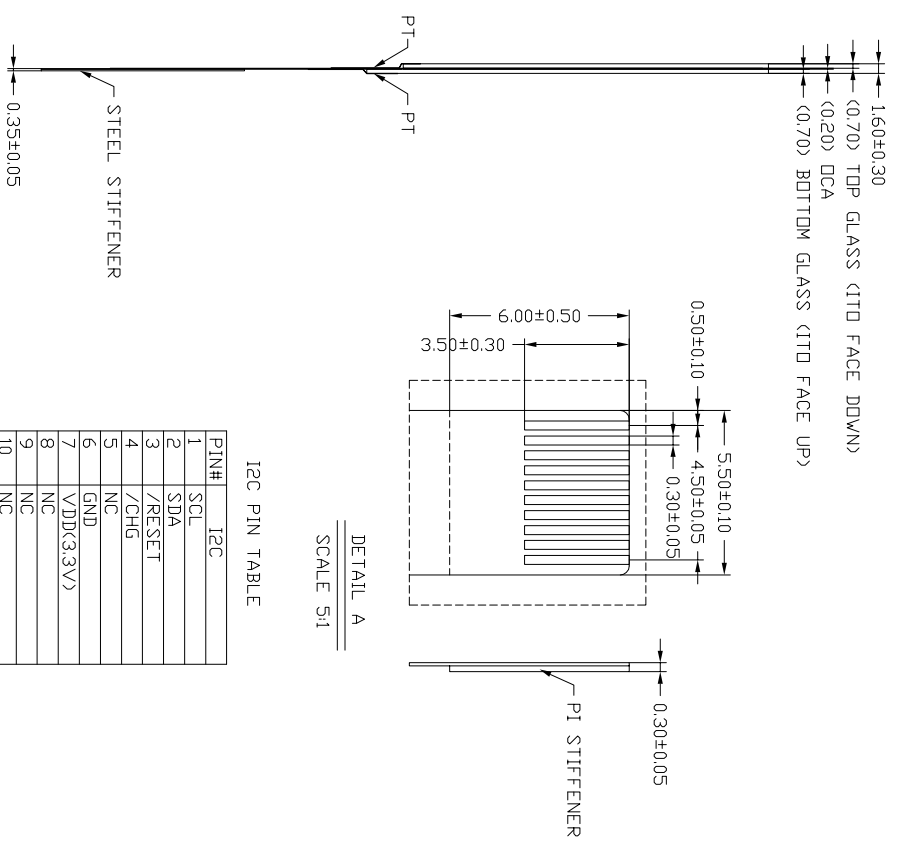


REV	DESCRIPTION	BY	DATE
A	RELEASED (BASED ON VERSION RT1)	Ruby Long	2013/10/31

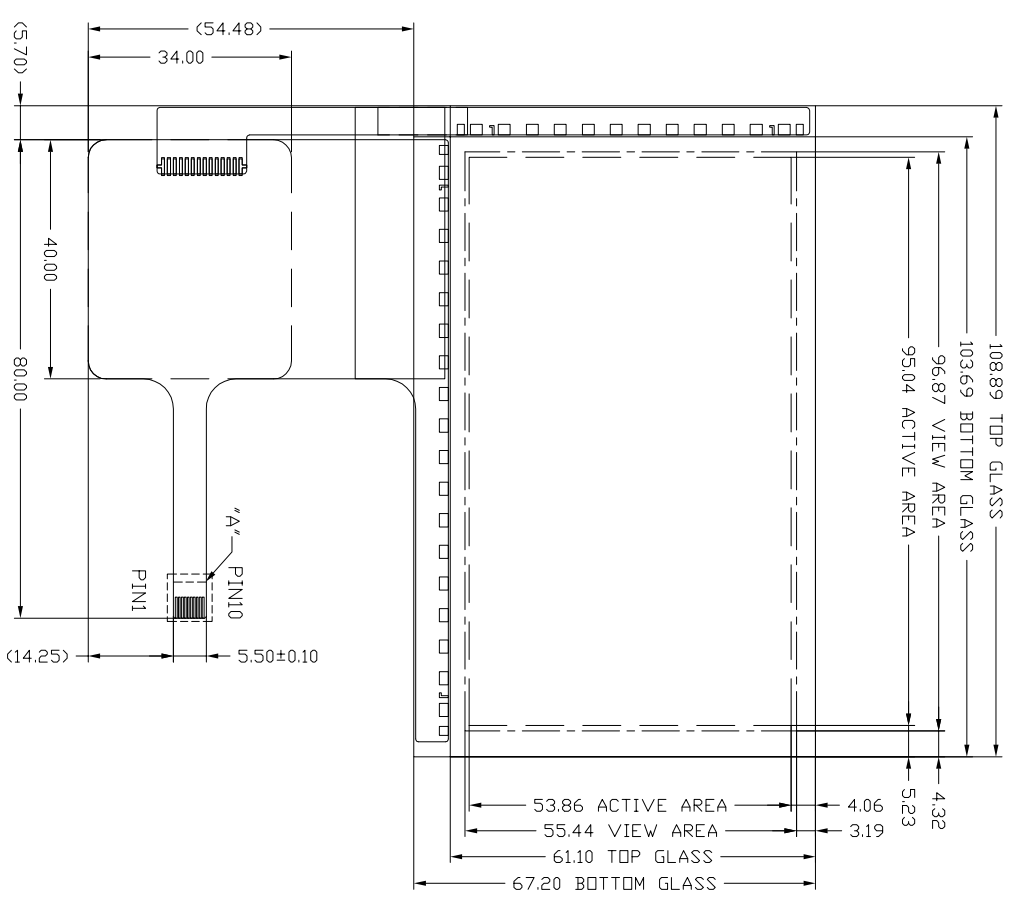

I2C PIN TABLE

PIN#	I2C
1	SCL
2	SDA
3	/RESET
4	/CHG
5	NC
6	GND
7	VDD(3.3V)
8	NC
9	NC
10	NC

- NOTES:
1. ALL DIMENSIONS IN MM.
 2. OPERATING TEMPERATURE: -20°C TO 80°C
 3. STORAGE TEMPERATURE: -30°C TO 80°C
 4. FCC BENDING RADIUS IS R1.0MM MIN
 5. ALL MATERIALS MUST BE ROHS COMPLIANT
 6. (*) DIMENSION FOR REFERENCE
 7. THE COMPATIBLE MOLEX FCC CONNECTOR IS 52745-1097 OR EQUIVALENT

THIS DOCUMENT IS CONFIDENTIAL, PROPRIETARY INFORMATION OF DOLAR CORPORATION AND SHALL NOT BE DISSEMINATED OR REPRODUCED IN ANY MANNER WITHOUT THE SPECIFICALLY WRITTEN CONSENT OF DOLAR CORPORATION.

UNLESS OTHERWISE NOTED:

UNITS	DECIMAL
INCHES (mm)	±0.008(0.20)
ANGLES	±0.5°

THIRD ANGLE PROJECTION

ENGR MANAGER: Neil Zeng

CHECKED BY: Ruby Long

DWN BY: Ruby Long

DRAWING TITLE: 4.3" ND FACE PLATE, mXT224S, I2C

DRAWING No.: F043-0224S-194

SCALE: 1:1

DATE: 2013/10/31

DATE: 2013/10/31

DATE: 2013/10/31

REV: A

SHEET: 1 OF 1