



REV	DESCRIPTION	BY	DATE
A	RELEASED & BASED ON VERSION RT10	Ruby Long	2013/11/08

160±0.30  
 TOP GLASS (TID FACE DOWN)  
 DCA  
 BOTTOM GLASS (TID FACE UP)

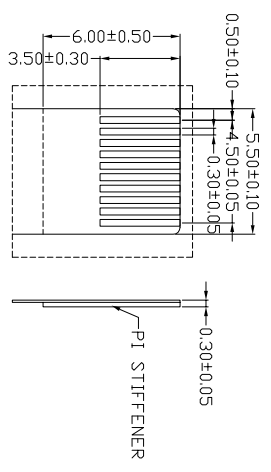


DETAIL A  
SCALE 5:1



I2C PIN TABLE

PIN#	I2C
1	SCL
2	SDA
3	/RESET
4	/CHG
5	NC
6	GND
7	VDD(3.3V)
8	NC
9	NC
10	NC

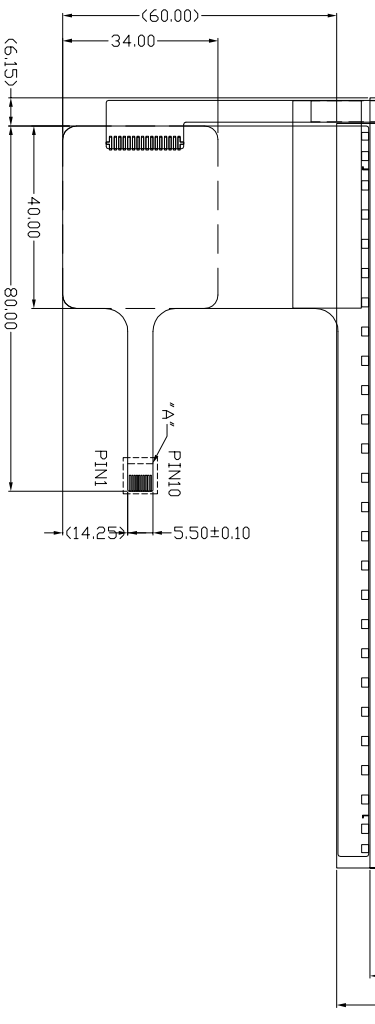

NOTES:

1. ALL DIMENSIONS IN MM.
2. OPERATING TEMPERATURE: -20°C TO 80°C
3. STORAGE TEMPERATURE: -30°C TO 80°C
4. FPC BENDING RADIUS IS R1.0MM MIN
5. ALL MATERIALS MUST BE ROHS COMPLIANT
6. (\*) DIMENSION FOR REFERENCE
7. THE COMPATIBLE MOLEX FPC CONNECTOR IS 52745-1097 OR EQUIVALENT

**OCULAR**  
DIGITAL YOUR ADVANTAGE

THIS DOCUMENT IS CONFIDENTIAL, PROPRIETARY INFORMATION OF OCULAR CORPORATION AND SHALL NOT BE DISSEMINATED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF OCULAR CORPORATION.

UNLESS OTHERWISE NOTED:		ENGR MANAGER:		DATE:	
UNITS	DECIMAL	CHECKED BY:	Neil Zeng	DATE:	2013/11/08
INCHES	XXXX.XX	DWN BY:	Ruby Long	DATE:	2013/11/08
ANGLES	±0.5°	DRAWING TITLE:	7" ND FACE PLATE, MXT1336S, I2C		
THIRD ANGLE PROJECTION		DRAWING No.:	F070-0336S-194		
		SCALE	1 : 1		SHEET 1 OF 1