



REV :	DESCRIPTION :	BY :	DATE :
A	RELEASED (BASE ON VERSION RT2)	Neil Zeng	2014/02/10

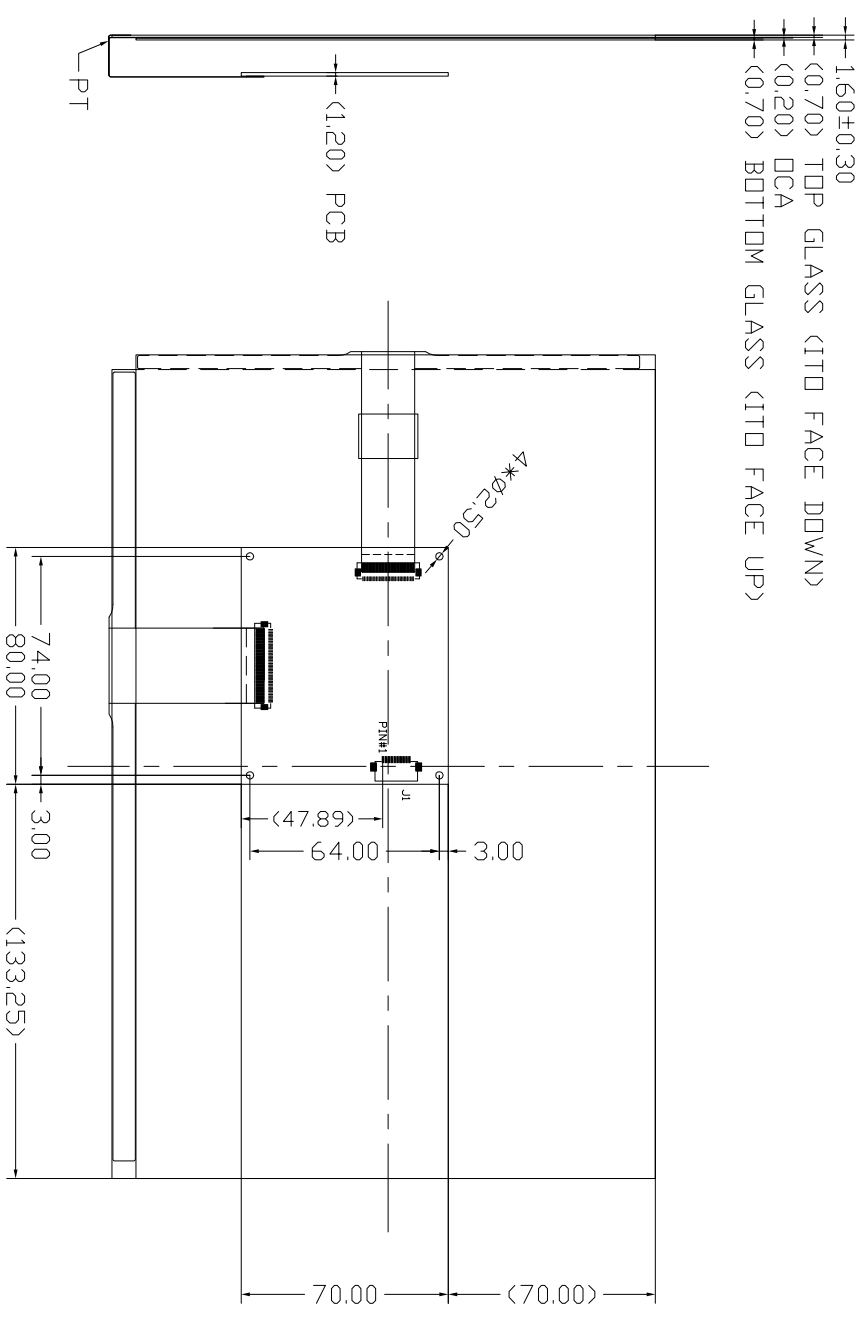

J1(I2C) PIN TABLE

PIN#	SCL	J1 (I2C)
1	SCL	
2	SDA	
3	/RESET	
4	/CHG	
5	NC	
6	GND	
7	VDD(3.3V)	
8	NC	
9	NC	
10	NC	

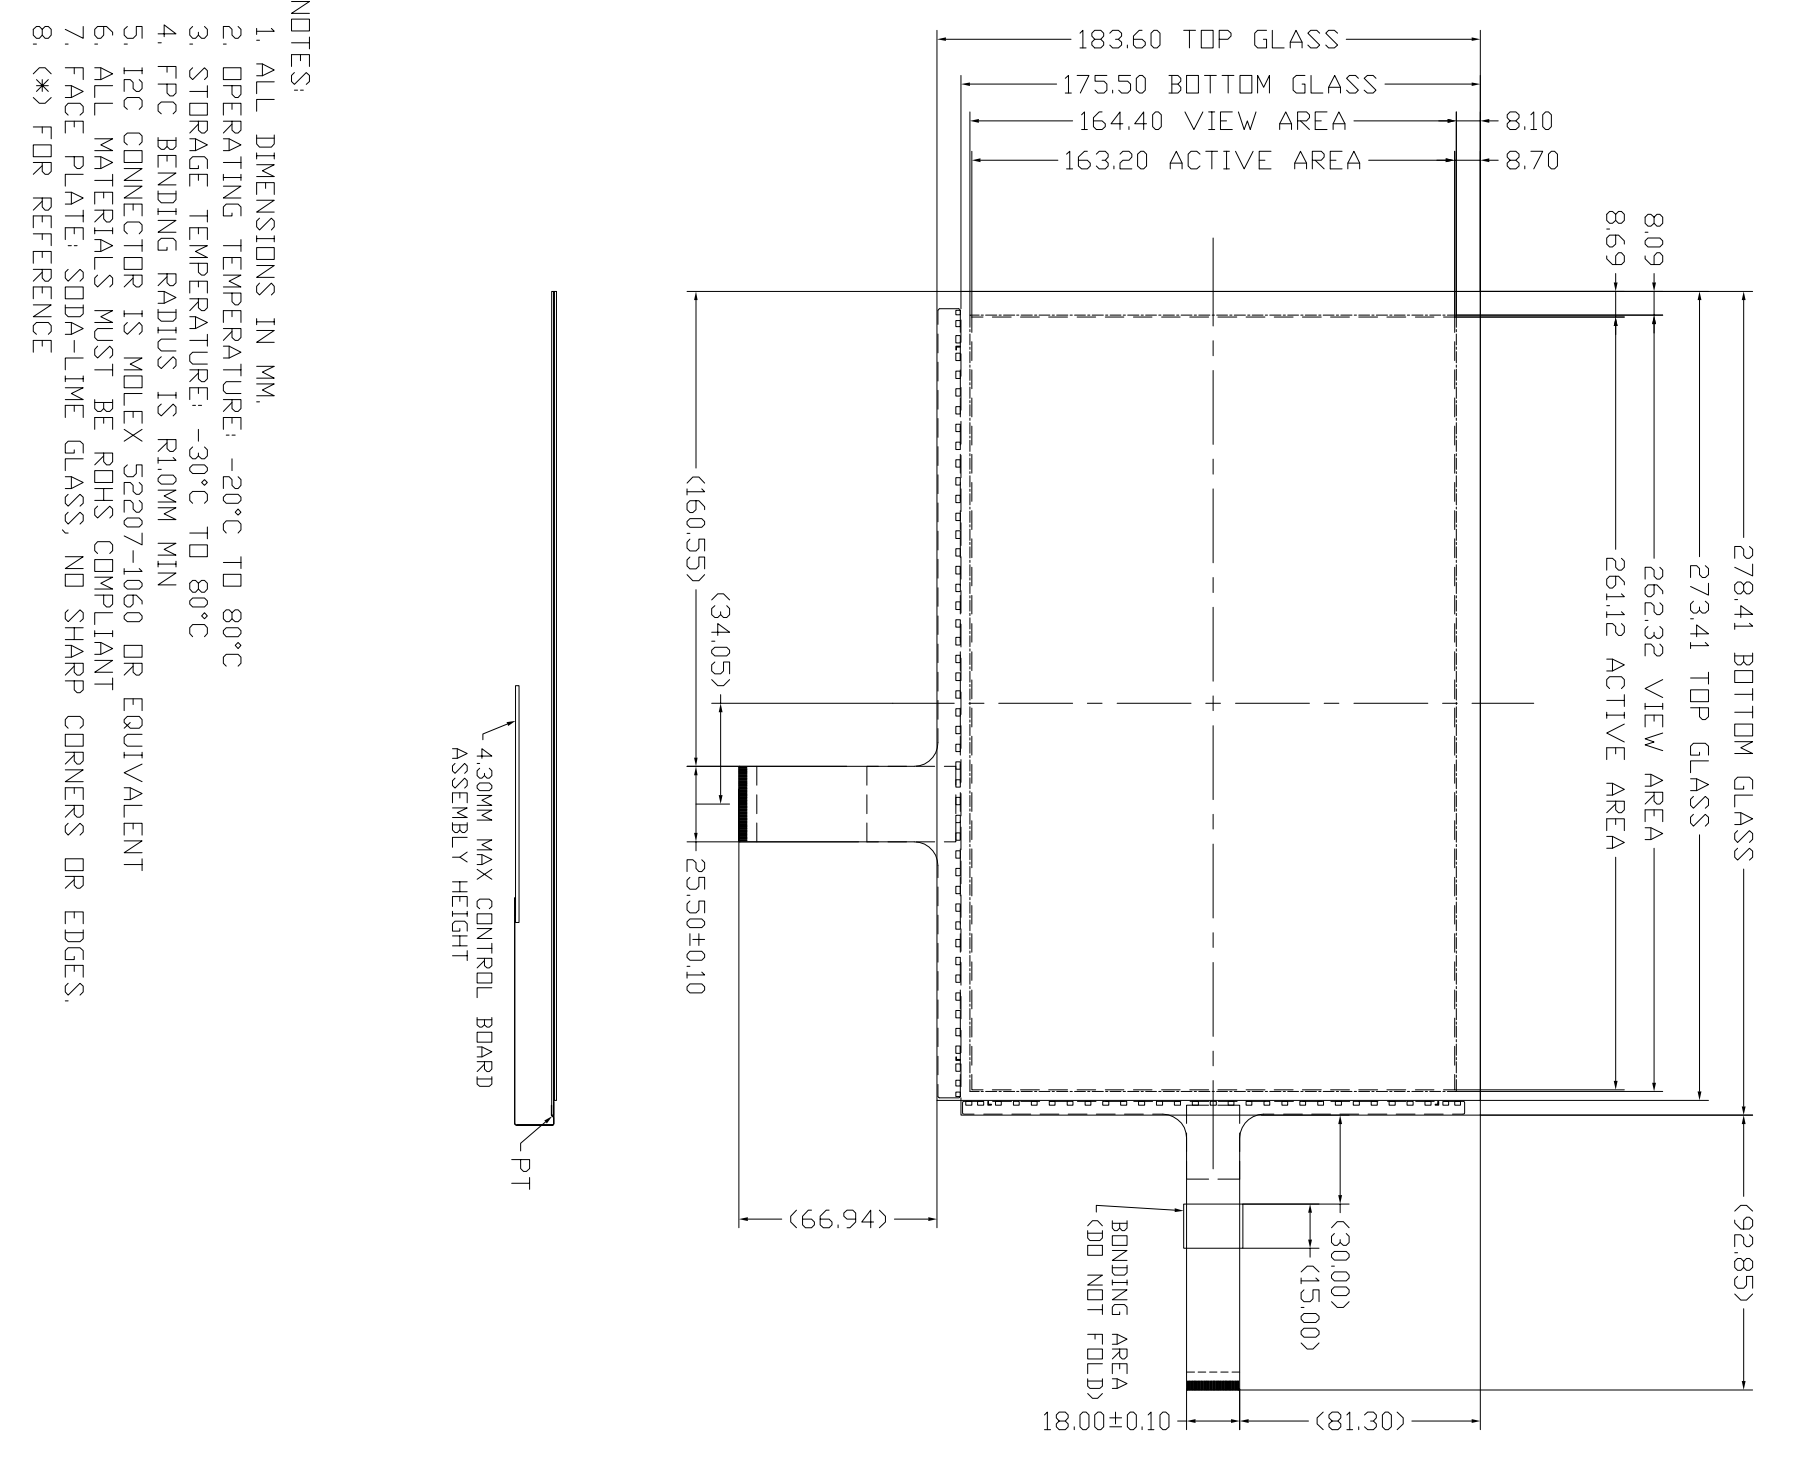

- NOTES:
1. ALL DIMENSIONS IN MM.
 2. OPERATING TEMPERATURE: -20°C TO 80°C
 3. STORAGE TEMPERATURE: -30°C TO 80°C
 4. FPC BENDING RADIUS IS R1.0MM MIN
 5. I2C CONNECTOR IS MDLX 52207-1060 OR EQUIVALENT
 6. ALL MATERIALS MUST BE ROHS COMPLIANT
 7. FACE PLATE: SODA-LIME GLASS, NO SHARP CORNERS OR EDGES.
 8. (*) FOR REFERENCE

REGULAR
Display Your Advantage

THIS DOCUMENT IS CONFIDENTIAL, PROPRIETARY INFORMATION OF DOLLAR CORPORATION AND SHALL NOT BE DISCLOSED OR COPIED OR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SPECIFICALLY FORNISHED WITHOUT THE PRIOR WRITTEN CONSENT OF DOLLAR CORPORATION.

UNLESS OTHERWISE NOTED :	ENGR MANAGER :	DATE :
UNITS : DECIMAL	CHECKED BY : Jacky Li	DATE : 2014/02/10
INCHES [mm] : XXXLXX] ±0.008(0.201)	D/WN BY : Neil Zeng	DATE : 2014/02/10
ANGLES : ±0.5°	DRAWING TITLE : F121-1188S-100	DRAWING No. : F121-1188S-100
THIRD ANGLE PROJECTION	SCALE : 1 : 1	SHEET : 1 OF 1
		REV : A